


YSC650A 系列施工升降机 Series Builder Hoist

产品特点

- 模块化设计，可以方便地组成不同的机型
- 采用高强度结构钢制造，结构轻巧
- 主要结构件热浸镀锌，延长使用寿命
- 变频调速系统启动与制动非常平稳，启动电流低，对设备的损耗小
- 采用齿轮减速传动，高效节能
- 多种吊笼门体选择，满足不同需求
- 标准吊笼规格为650×650×1508mm，采用中置齿条，齿条模数为5mm


Features

- Modular design, easy to make different combinations according to requirement
- Adopting high quality steel for increased strength and weight reduction
- Main components are hot dip galvanized which guarantee longer lifetime
- With frequency control, starting and stopping is smooth, low start-up current, small wear
- Using high efficiency helical gear box, lower power consumer and operation cost
- With many different models of cage door available
- The mast section type is 650×650×1508mm, use centrally located rack. The rack modulus is 5mm

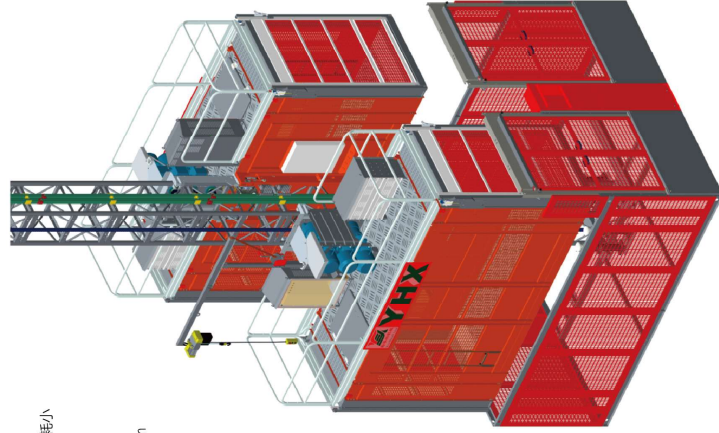

技术参数表 Technical data sheet

型号 Model	额定载重 Payload kg	提升速度 speed m/min	电机功率 Motor power kw	变频器功率 Inverter power kw
SC100 SC100/100	1000	0-35	2×3.5	22
		0-46	2×13	30
		0-54	2×16	37
		0-63	2×20	45
SC200 SC200/200	2000	0-96	3×20	75
		0-35	2×13	30
		0-46	2×20	45
		0-54	2×20	45
SC250 SC250/250	2500	0-63	2×26	75
		0-96	3×28	110
		0-35	2×16	37
		0-46	3×16	55
SC300 SC300/300	3000	0-54	3×16	55
		0-63	3×20	75
		0-96	3×32	110
		0-35	2×20	45
SC350 SC350/350	3500	0-46	3×20	75
		0-54	3×20	75
		0-63	3×26	90
		0-96	3×35	132

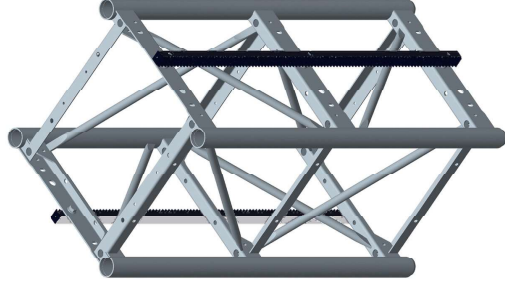

YSC650A 标准节
Mast section



YSC650A 防坠器
Safety device

备注：
吊笼尺寸规格（长×宽×高）（m）：3.2×1.5×2.3/2.0，3.9×1.5×2.3/2.0，4.6×1.5×2.3/2.0；
也可以根据用户的要求定制。

Remark:
Cage size (L×W×H)(m): 3.2×1.5×2.3/2.0，3.9×1.5×2.3/2.0，4.6×1.5×2.3/2.0；
We can also design other cage sizes on user's request.